


Precision Machined Standard Bearings

CB14 Conveyor Bearings

Design and Operational Specifications:

- Meet the speed and reliability requirements of driven conveyor rolls
- Significantly reduce noise level of the conveyor system
- Precision machined from quality steel
- Feature flanged O.D. for ease of mounting
- Both rings are of one-piece construction
- Nylon ball retainer permits operation up to 2000 RPM
- Unique nylon adapter in bore to accommodate standard 7/16 in. hex shafting and dampen noise normally transmitted to the conveyor frame

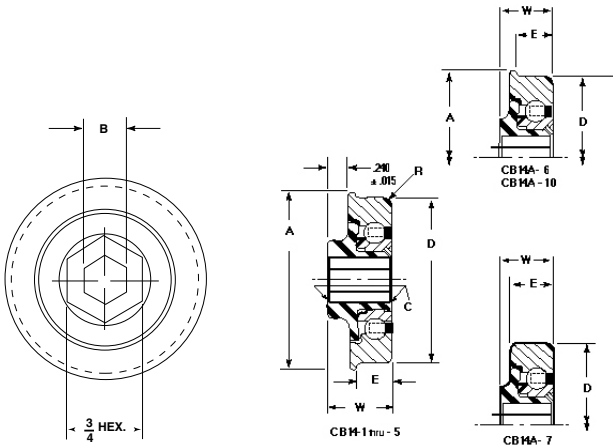


Bearing Number	Hex Bore	Outside Diameter	Flange A	Width		C	R
	B			W	E		
in.	in.	in.	in.	in.	in.	in.	in.
CB14-1	.466/.456	1.469/1.464	1.537	.712	.372	.040/.020	3/16
CB14-2	.466/.456	1.503/1.498	1.574	.712	.410	.040/.020	5/64
CB14-3	.466/.456	1.529/1.524	1.600	.712	.410	.040/.020	5/64
CB14-4	.466/.456	1.880/1.875	1.951	.712	.410	.040/.020	5/64
CB14-5	.466/.456	1.603/1.598	1.675	.712	.410	.040/.020	5/64
CB14A-6	.466/.456	1.712/1.707	1.783	.520	.410	.040/.020	5/64
CB14A-7	.466/.456	1.712/1.707	—	.520	.472	.040/.020	5/64
CB14A-10	.466/.456	1.628/1.623	1.700	.520	.410	.040/.020	5/64

Single Row Ball Bearings

Design and Operational Specifications:

- Designed for light loads and speeds up to 1200 RPM
- Full complement of precision steel balls in deep ball grooves
- Heat-treated races machined from steel bar stock to a controlled finish
- Thrust capacity in either direction is 50% of listed radial rating



Bearing Number	Bore B	Outside Diameter D	Width W	Balls	Radial Load Rating at 600 RPM
	Tolerance +.005 to -.000	Tolerance +.000 to -.005	Tolerance ±.005	No. Size	lbs.
	in.	in.	in.	in.	lbs.
SR-150	1/8	3/8	5/32	13 1/16	5
SR-253	3/16	11/16	1/4	11 1/8	29
SR-254	1/4	11/16	1/4	12 1/8	32
SR-255	1/4	3/4	1/4	13 1/8	34
SR-255-89	3/16	3/4	1/4	10 5/32	41
SR-266	3/16	7/8	1/4	12 5/32	49
SR-267	1/4	7/8	1/4	12 5/32	49
SR-268	5/16	7/8	1/4	15 1/8	40
SR-269	3/8	7/8	1/4	16 1/8	42
SR-270	5/16	29/32	5/16	13 5/32	53
SR-280-1	5/16	15/16	5/16	13 5/32	53
SR-281	3/8	15/16	5/16	17 1/8	45
SR-290	1/4	1	5/16	13 5/32	53
SR-311	1/4	11/16	1/4	13 5/32	53
SR-312	5/16	11/16	1/4	13 5/32	53
SR-314	5/16	11/16	3/8	13 5/32	53
SR-315	3/8	11/16	3/8	14 5/32	57
SR-333	3/8	11/8	3/8	14 5/32	57
SR-337	1/2	11/8	3/8	16 5/32	66
SR-340-1	3/8	13/16	3/8	13 3/16	81
SR-342	3/8	11/4	3/8	13 3/16	81
SR-342-58	1/2	11/4	3/8	15 3/16	87
SR-347	1/2	19/32	5/16	15 3/16	87
SR-381	1/2	13/8	7/16	17 3/16	99
SR-500	1/2	11/2	7/16	13 1/4	136
SR-503	5/8	11/2	7/16	13 1/4	136
SR-550	1/2	19/16	7/16	14 1/4	147
SR-620	3/4	15/8	3/8	15 1/4	157


⚠ WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov

Precision Machined Standard Bearings

Flange-Type Ball Bearings

Design and Operational Specifications:


- Designed for light loads and speeds up to 1200 RPM
- Mount directly into wheel hubs, pulleys and conveyor rollers
- Full complement of precision steel balls in deep ball grooves
- Heat-treated races machined from steel bar stock to a controlled finish
- Thrust capacity in either direction is 50% of listed radial rating



Double Row Ball Bearings

Design and Operational Specifications:

- Designed for light loads and speeds up to 1200 RPM
- Double row of full complement precision steel balls in deep ball grooves for increased stability
- Heat-treated races machined from steel bar stock to a controlled finish
- Thrust capacity in either direction is 33% of listed radial rating



Bearing Number	Bore B	Outside Diameter D	Width W ₁	Width w ₂	E	Balls		Radial Load Rating at 600 RPM
	Tolerance +.005 to -.000	Tolerance +.005 to -.000	Tolerance ±.005		No.	Size		
	in.	in.	in.	in.	in.	in.	lbs.	
F-150	1/4	11/16	5/16	1/4	13/16	12	1/8	32
F-155	1/4	3/4	5/16	1/4	7/8	12	1/8	32
F-160	1/4	13/16	5/16	1/4	29/32	13	1/8	34
F-165	5/16	7/8	5/16	1/4	1	15	1/8	40
F-175-1	1/4	29/32	7/16	3/8	1	13	5/32	53
F-175-2	5/16	29/32	7/16	3/8	1	13	5/32	53
F-175-3	3/8	29/32	7/16	3/8	1	16	1/8	42
F-175-4	7/16	29/32	7/16	3/8	1	17	1/8	45
F-200-1	7/16	29/32	7/16	11/32	11/16	17	1/8	45
F-225	3/8	1	7/16	3/8	11/8	14	5/32	57
F-250	7/16	11/16	7/16	3/8	13/16	15	5/32	61
F-250-2	3/8	11/16	7/16	3/8	13/16	15	5/32	61
F-300	1/2	11/8	1/2	3/8	11/4	16	5/32	65
F-300-19	3/8	11/8	1/2	3/8	11/4	16	5/32	65
F-310	1/2	13/16	1/2	3/8	15/16	16	5/32	65
F-325	9/16	11/4	1/2	7/16	13/8	18	5/32	74
F-350-11	3/8	13/8	1/2	7/16	11/2	11	1/4	115
F-350-12	1/2	13/8	1/2	7/16	11/2	12	1/4	125
F-350-13	5/8	13/8	1/2	7/16	11/2	17	3/16	99
F-350-89	3/4	13/8	7/16	3/8	11/2	22	5/32	90
F-500	11/16	11/2	5/8	7/16	15/8	18	3/16	110
F-550	1/2	19/16	21/32	17/32	111/16	12	1/4	125
F-600-3	3/4	15/8	9/16	1/2	13/4	15	1/4	157
F-700	3/4	111/16	9/16	1/2	113/16	15	1/4	157
F-750	3/4	13/4	5/8	9/16	17/8	15	1/4	157
F-850	5/8	17/8	5/8	9/16	2	17	1/4	178
F-1000	7/8	2	5/8	9/16	21/8	19	1/4	200
F-1000-4	1	2	5/8	9/16	21/8	19	1/4	200
F-1100	11/4	21/8	5/8	9/16	21/4	21	1/4	220

Bearing Number	Bore B	Outside Diameter D	Width W ₁	Width W ₂	Balls		Radial Rating at 600 RPM
	Tolerance +.005 to -.000	Tolerance +.000 to -.005	Tolerance ±.005		No	Size	
	in.	in.	in.	in.	in.	lbs.	
D-2253	3/16	11/16	7/16	13/32	22	1/8	43
D-2254	1/4	11/16	7/16	13/32	24	1/8	48
D-2255	1/4	3/4	7/16	13/32	24	1/8	48
D-2267	1/4	7/8	7/16	13/32	24	5/32	73
D-2269	3/8	7/8	7/16	13/32	32	1/8	63
D-2290	3/8	1	7/16	13/32	28	5/32	85
D-2337	1/2	11/8	9/16	17/32	32	5/32	99
D-2383	5/8	13/8	5/8	19/32	34	3/16	148
D-2500	1/2	11/2	3/4	23/32	26	1/4	204
D-3010	3/4	2	7/8	27/32	38	1/4	300

Load Rating Factors for Single, Double, and Flange-Type Standard Ball Bearings

Radial load ratings given for standard size bearings are based on a speed of 600 Rpm. For radial load ratings at speeds other than 600 RPM, multiply the listed rating by the appropriate factor indicated in the table to the right.

Table of Speed/Radial Load Rating Factors

Speed (RPM)	Factor
50	3.6
100	2.7
300	1.4
900	.8
1000	.7
1200	.6

⚠ WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov